SIEMENS

## Hoja de datos 3UF7933-0BA00-0

cable de enlace Longitud 2,5 m, redondo, para conectar la unidad base, Módulo de medida de intensidad, módulo de medida de intensidad/tensión, bloque de control de operador o módulos de ampliación a través de la interfaz del sistema



| Datos técnicos generales: | |
|---|---|
| **Nombre comercial del producto** | SIRIUS |
| **Designación del producto** | Cable de conexión |
| **Tipo de producto** | Longitud 2,5 m, redondo |
| **Temperatura ambiente** | |
| • durante el almacenamiento | -40 ... +80 °C |
| • durante el funcionamiento | -25 ... +60 °C |
| • durante el transporte | -40 ... +80 °C |

Certificados/ Homologaciones:


Sujeto a cambios
© Copyright Siemens

| General Product Approval | | EMC | Declaration of Conformity | Test Certificates | Shipping Approval |
|---|---|---|---|---|---|
| UL | | RCM | EG-Konf. | Type Test Certificates/Test Report | ABS |

| Shipping Approval | | | other | | |
|---|---|---|---|---|---|
| LRS | PRS | RMRS | Confirmation | PROFINET-Certification | PROFIsafe-Certification |

| other |
|---|
| Profibus |

## Más información

**Information- and Downloadcenter (Catálogos, Folletos,…)**
http://www.siemens.com/industrial-controls/catalogs


**Industry Mall (sistema de pedido online)**
https://mall.industry.siemens.com/mall/es/es/Catalog/product?mlfb=3UF7933-0BA00-0

**Generador CAx online**
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7933-0BA00-0

**Service&Support (Manuales, certificados, características, FAQ,…)**
https://support.industry.siemens.com/cs/ww/es/ps/3UF7933-0BA00-0

**Base de datos de imágenes (fotos de producto, dibujos acotados 2D, modelos 3D, esquemas de conexiones, macros EPLAN, …)**
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7933-0BA00-0&lang=en


© Copyright Siemens

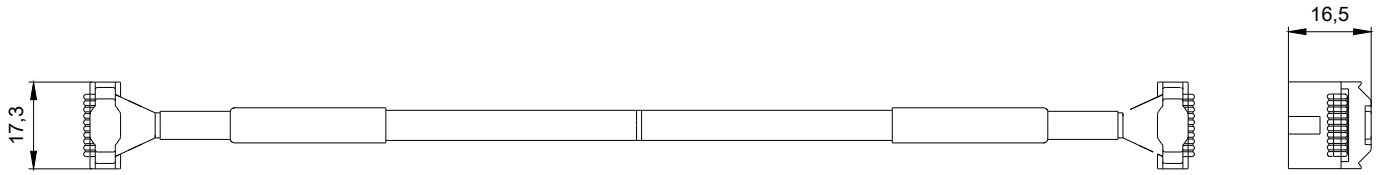



© Copyright Siemens




© Copyright Siemens




© Copyright Siemens