SIEMENS

Product data sheet 5SY5210-7



Similar to image

CIRCUIT BREAKER CURR. SENS DC 440V AC 400V 10KA,
2-POLE, C, 10A

Technical data:		
Overvoltage class		3
type of voltage		AC/DC
Tripping characteristic class		C
Degree of pollution		3
Mounting depth	mm	70
Energy limiting class		3
Number of poles		2
Number of pitch units for width		2
Product function / n-switching		No
Supply voltage frequency / rated value	Hz	50
Breaking capacity current / acc. to EN 60898 / rated value	kA	10
Supply voltage / for AC / rated value	V	400
Current / for AC / rated value	A	10
Protection class IP		IP20, with connected conductors
Product extension / can be installed / supplementary device		Yes
power loss		-
Operational voltage Um		-
rated current In		-

subject to modifications
© Copyright Siemens AG 2011

Rated make-break capacity Icn		-
Rated service short-circuit breaking capacity Ics		-
Rated ultimate short-circuit breaking capacity Icu		-
Tripping characteristics Number		-
Tripping characteristic/-class Conventional tripping current I2, (x In)		-
rated current In IEC, DIN/VDE		-
Tripping characteristic/-class Test current I4, hold (x In)		-
Resistance against shock / according to IEC 60068-2-27		150m/s² at 11ms half-sine

Certificates/approvals:

General Product Approval			Declaration of Conformity	other
CQC	ROSTEST	VDE	Manufacturer	other

Further information:

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs


Industry Mall (Online ordering system)
http://www.siemens.com/lowvoltage/mall


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/5SY5210-7/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY5210-7


CAx-Online-Generator
http://www.siemens.com/cax

© Copyright Siemens AG 2011

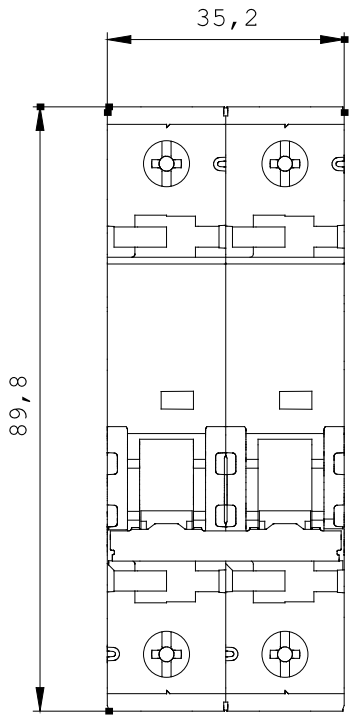

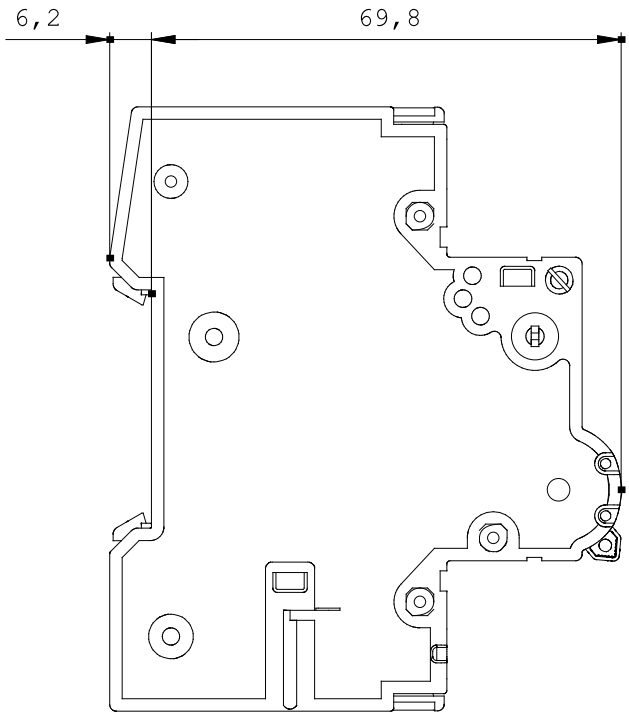

subject to modifications
© Copyright Siemens AG 2011

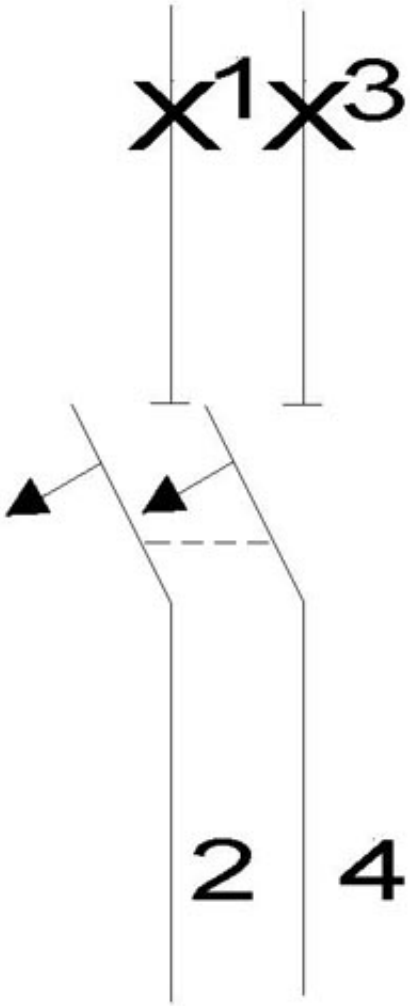

last change: Nov 3, 2011

subject to modifications
© Copyright Siemens AG 2011