BF-W 300A WINDOW FAN

Item no. 7219

Version: 60 Hz

Document type: **Product card**
Document date: **2019-09-04**
Generated by: **Systemair Online Catalogue**

Description

- BF-W axial fan for window mounting



Suitable for a variety of domestic and commercial applications, the BF-W range has been designed for window or wall mounting.

These extract fans are easy to install and manufactured from ABS plastic for durability, ease of cleaning and maintenance and cover a wide variety of domestic and commercial applications including kitchens, utility rooms, pubs, restaurant, offices shops and factories. They, can be connected either through the light switch, so that they start when the light is turned on, or through a separate switch.


BF-W is equipped with external gravity backdraught shutters.


Technical parameters

Voltage	230	V
Frequency	60	Hz
Phase	1	~
Input power (P1)	76,4	W
Current	0,345	A
Max. airflow	369	cfm
Fan impeller speed	941	r.p.m.
Max. temperature of transported air	51,8	°C
Max. temperature of transported air when voltage-controlled	51,8	°C
Sound pressure level at 3 m (20m² Sabin)	52	dB(A)
Weight	5,2	kg
Insulation class	B	
Enclosure class, motor	IP44	
Capacitor	3,15	µF

Performance


Diagrams

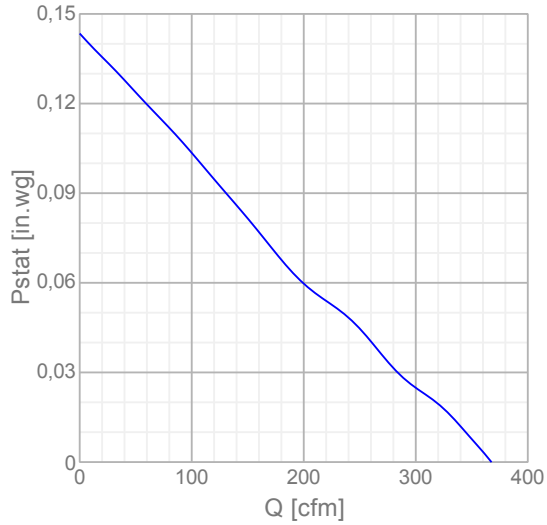

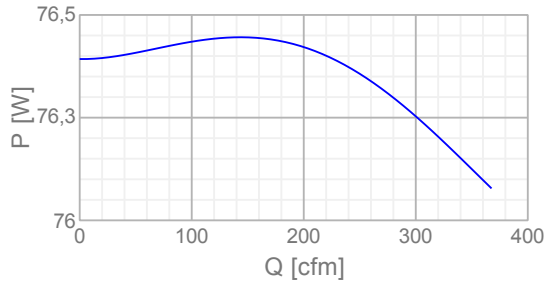

Dimensions

X = In, Y = Out

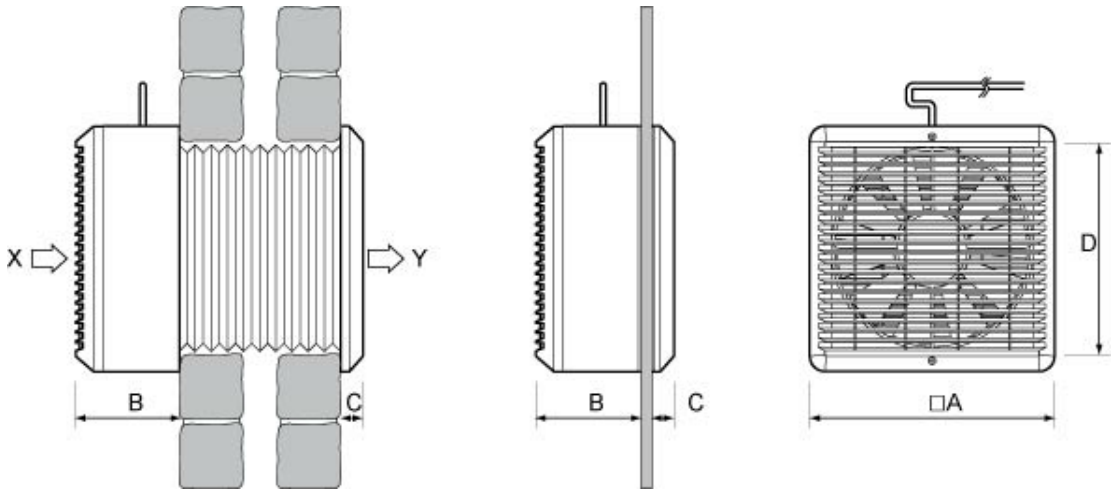

Wall mounting Window mounting

BF-W	A	B	C	D
100A	163	90	30	98
120A	182	92	32	118
150A	203	105	23	150
230A	286	125	25	230
300A	362	145	29	300