


Plug AM-TOP® - Part no. 253



|                       |                 |
|-----------------------|-----------------|
| Protection type       | IP 44           |
| Ampere                | 16 A            |
| Poles                 | 4 p             |
| Voltage               | 500 V           |
| Hertz                 | 50-60 Hz        |
| Earth position        | 7 h             |
| Contact               | standard        |
| Connection technology | Screw terminals |

Plug AM-TOP® - Part no. 253

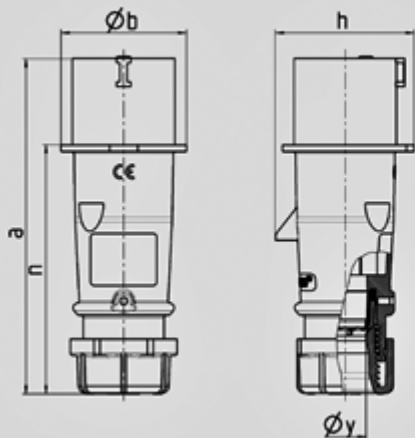

| Drawing<br>2 MB 217      | Amp.<br>Poles | 16    |       |       | 32  |     |      |
|--------------------------|---------------|-------|-------|-------|-----|-----|------|
|                          |               | 3     | 4     | 5     | 3   | 4   | 5    |
| Dim. in mm               | a             | 142   | 147   | 147   | 186 | 186 | 180  |
|                          | b             | 53    | 59    | 67    | 70  | 70  | 77   |
|                          | h             | 59    | 69,4  | 76    | 81  | 81  | 89,5 |
|                          | n             | 105,2 | 110,5 | 110,5 | 141 | 141 | 135  |
|                          | y             | 14,5  | 16    | 16    | 22  | 22  | 22   |
| Terminal for cond. cross |               | 1     | 1     | 1     | 2,5 | 2,5 | 2,5  |
| section (mm²) min.-max.  |               | —2,5  | —2,5  | —2,5  | —6  | —6  | —6   |