BF SLIM 150

Document type: **Product card**

Domestic fans

Description

- Aesthetic front cover for modern interior design.
- Models available for mounting on: wall/window/ceiling.
- ABS Shutter, PET Shutter, ring is optional, shutter is needed to avoid backflow, ring is needed for window mount.
- ball bearing motor, which provides longer equipment life. Reduce friction for long-lasting operation
- Shaded pole motor with thermos cut-off.
- In different painted colors or chrome painted.
- Safety design based on IEC requirements, approved by SAA CE RoHS.



Systemair domestic fans offer highest system performance at low installation and running costs. Ideal for air-extraction in bathroom, toilet and small/medium premises. Suitable to extract stale air directly to the outside or through short length ducting. Units can be wall/panel, ceiling and window mounted.

Technical parameters


Nominal data		
Voltage	220	V
Frequency	60	Hz
Phase	1	~
Nominal power at shaft (P2)	18	W
Static pressure	60	Pa
Max. airflow	320	m^3/h
Fan speed	1850	r.p.m.
Current	0.114	A

Temperature data		
Max. temperature of transported air	50	°C


Sound data		
Sound pressure level at 3 m (free field)	35	dB

Protection / Classification		
Plastic Material	ABS	
Enclosure class, motor	IPX2	IP

Dimensions

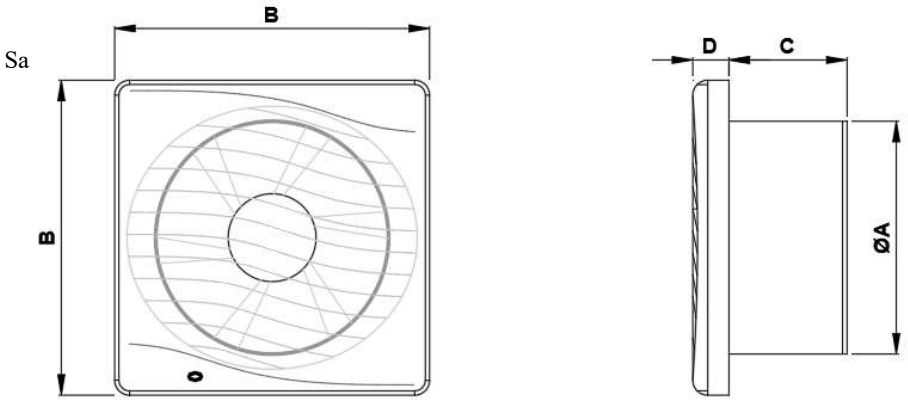

	øA	B	C	D
BF SLIM 150	149	200 x 200	81	23

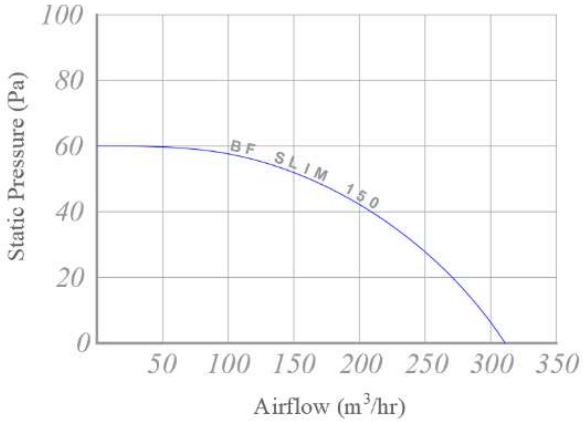

Accessory included in the standard model:

